


GRADING ENVELOPE

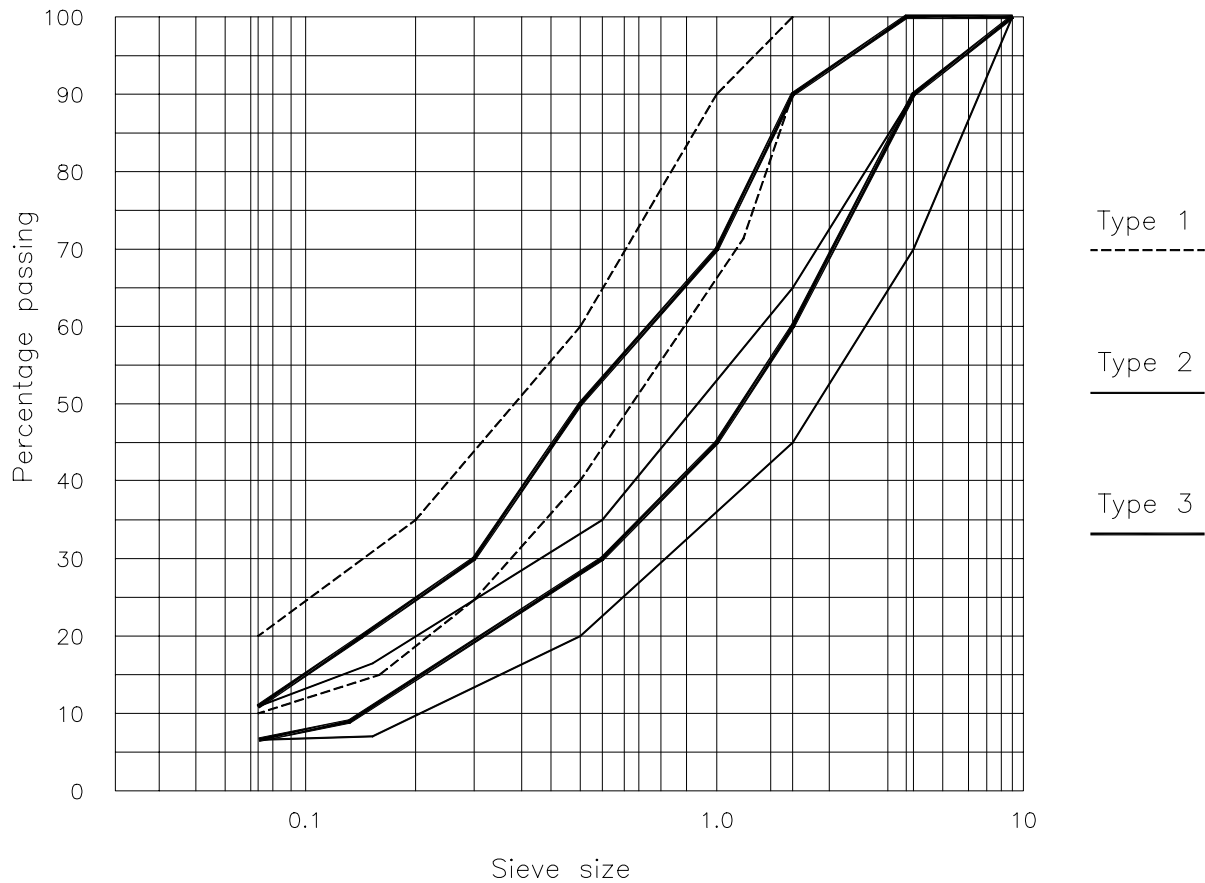

RESIDUAL BITUMEN CONTENT	Type 1: 10–16%. Type 2: 7.5–13.5%. Type 3: 6.5–12%
DEPTH OF SLURRY	Type 1: 5.5±1mm. Type 2: 7.0±1mm. Type 3: 8.5±1mm
BITUMINOUS EMULSION	Shall be cationic and shall conform to BS 434 and TNZ M/1. The emulsion shall be polymer modified with a minimum of 2% polymer.
MAXIMUM ABRASION LOSS	850 g/m ²
APPLICATION	On all roads as a rehabilitation measure on a specific design approval basis.
PRIME COAT	Immediately prior to application, pavement surfaces shall be moistened with a fog spray of water, applied at the rate of 0.10 – 0.20 litres/m ²

MANARC
MANUKAU CITY APPROVED
REQUIREMENT

DETAIL:
**SLURRY SEAL
ASPHALTIC CONCRETE**

UPDATED:
SEPT 1998

DETAIL No:
MRR-1

MANUKAU CITY COUNCIL